

THE 67TH INTERNATIONAL



OPEN READINGS

CONFERENCE FOR STUDENTS OF PHYSICS AND NATURAL SCIENCES

**BOOK OF
ABSTRACTS** | **2024**



Vilnius
University

VILNIUS UNIVERSITY PRESS

Editors:

Martynas Keršys
Rimantas Naina
Vincentas Adomaitis
Emilijus Maskvytis

Cover and Interior Design:

Goda Grybauskaitė

Vilnius University Press
9 Saulėtekio Av., III Building, LT-10222 Vilnius
info@leidykla.vu.lt, www.leidykla.vu.lt/en/
www.knygynas.vu.lt, www.journals.vu.lt

Bibliographic information is available
on the Lithuanian Integral Library Information System (LIBIS) portal www.ibiblioteka.lt
ISBN 978-609-07-1051-7 (PDF)

© Vilnius University, 2024

CHARGE CARRIER MOBILITY IN SI IRRADIATED WITH FAST ELECTRONS

Paula Baltaševičiūtė¹, Algirdas Mekys¹, Leonid Makarenko², Šarūnas Vaitekūnas¹, Juožas Vidmantis Vaitkus¹

¹Vilnius University

²Belarusian State University

paula.baltaseviciute@ff.stud.vu.lt

Silicon material is widely used in semiconductor electronic devices, including irradiation detectors. Its demand is increased with grand applications for large facilities like CERN and many scientists are involved in the research to make Silicon detectors more irradiation resistant by exploiting defect engineering. To make it efficient, the research focuses on techniques like CV, IV, DLTS, TSC, photo absorption and more [1-4], capable to identify the impurities and their impact on the material parameters required for the device performance.

One of the popular techniques is charge carrier transport investigation exploiting Hall and magnetoresistance (MR) effects simultaneously. It is widely used to investigate electrical properties of semiconductors, including n-type Si, but much less information is available for boron doped p-type irradiated Si, where interstitial type defects are essential. So, this work is dedicated to applying Hall and MR effects to evaluate charge carrier transport peculiarities in p-type boron doped Si irradiated with fast electrons.

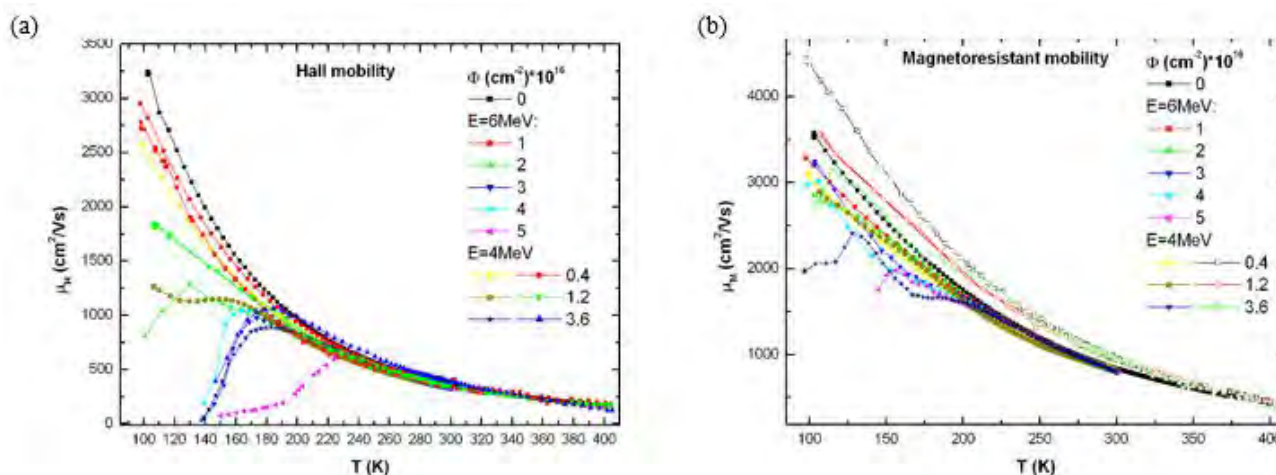


Fig. 1. Hall (a) and MR (b) mobility temperature dependencies for various irradiation fluencies

The measurements show a significant drop of Hall signal at lower temperatures, simultaneously with MR remaining high (Fig. 1). Charge carrier dependence on temperature reveals thermal activation energy (0.35-0.39eV), which was attributed to known point defect CiOi.

- [1] L. F. Makarenko et al, Phys. Status Solidi A 216 (2019) 1900354
- [2] C. Liao et al, Nucl. Ins. Phys. Res. A 1061 (2024) 169103
- [3] C. Besleaga et al, Nucl. Ins. Phys. Res. A 1017 (2021) 165809
- [4] V. P. Markevich et al, J Appl. Phys. 115 (2014) 012004