

THE 67<sup>TH</sup> INTERNATIONAL



# OPEN READINGS

CONFERENCE FOR STUDENTS OF PHYSICS AND NATURAL SCIENCES

**BOOK OF  
ABSTRACTS** | **2024**



Vilnius  
University

VILNIUS UNIVERSITY PRESS

Editors:

Martynas Keršys  
Rimantas Naina  
Vincentas Adomaitis  
Emilijus Maskvytis

Cover and Interior Design:

Goda Grybauskaitė

Vilnius University Press  
9 Saulėtekio Av., III Building, LT-10222 Vilnius  
info@leidykla.vu.lt, [www.leidykla.vu.lt/en/](http://www.leidykla.vu.lt/en/)  
[www.knygynas.vu.lt](http://www.knygynas.vu.lt), [www.journals.vu.lt](http://www.journals.vu.lt)

Bibliographic information is available  
on the Lithuanian Integral Library Information System (LIBIS) portal [www.ibiblioteka.lt](http://www.ibiblioteka.lt)  
ISBN 978-609-07-1051-7 (PDF)

© Vilnius University, 2024

# AMBIPOLAR HOSTS FOR BLUE TADF OLEDs: ASSESSMENT OF THE DEVICE PERFORMANCE AND LIFETIME

Kristupas Bagdonas<sup>1</sup>, Goda Grybauskaitė<sup>1</sup>, Gediminas Kreiza<sup>1</sup>, Edvinas Orentas<sup>2</sup>, Saulius Juršėnas<sup>1</sup>, Karolis Kazlauskas<sup>1</sup>, Dovydas Banevičius<sup>1</sup>


<sup>1</sup>Vilnius University, Institute of Photonics and Nanotechnology, Saulėtekio al. 3, Vilnius

<sup>2</sup>Vilnius University, Department of Organic Chemistry, Naugarduko g. 24, Vilnius  
[kristupas.bagdonas@ff.stud.vu.lt](mailto:kristupas.bagdonas@ff.stud.vu.lt)

In the past few years materials using thermally activated delayed fluorescence have experienced enormous attention thus allowing organic light emitting diodes (OLED) to reach internal quantum efficiency of 100%<sup>1</sup>. However commercially viable devices must possess a high external quantum efficiency, which can be achieved by optimizing the OLED's architecture. Structural refinement is only achievable when the exciton distribution in emitting layer (EML) is known<sup>2</sup>. It has been shown that by inserting a small amount of emitter that emits in another part of the spectrum it is possible to map exciton location in EML<sup>3</sup>.

The aim of the research was to show how exciton positions in EML depends on mixed host concentration. Using a well understood green **4CzIPN** emitter as pre, a portion of EML would be doped with it. By comparing the green shift of OLED's spectrum peak to the position of the probe in a mixed host, the exciton distribution will be determined.

Vacuum-deposited devices had an EML consisting of a mixed host **mCBP-CN:mCBP** doped with 7% **DMeCzIPN** emitter and probed with 2% **4CzIPN**. The device structure (see Fig. 1) is based on the past work of the scientific group<sup>4</sup>. OLEDs exhibited EQE up to 19% and the highest brightness up to 130000 cd/m<sup>2</sup> at a current density of 2500 mA/cm<sup>2</sup>. The obtained results (see Fig. 1) show that the spectrum peak characteristics depend on the probe's position. At OLED turn-on, all devices exhibited spectrum peaks around 502 nm wavelength, meaning that the recombination zone is uniformly distributed in the EML. By increasing the voltage, devices with a probe further from the HTL showed a smaller peak shift, indicating that the recombination zone shifted towards the ETL.

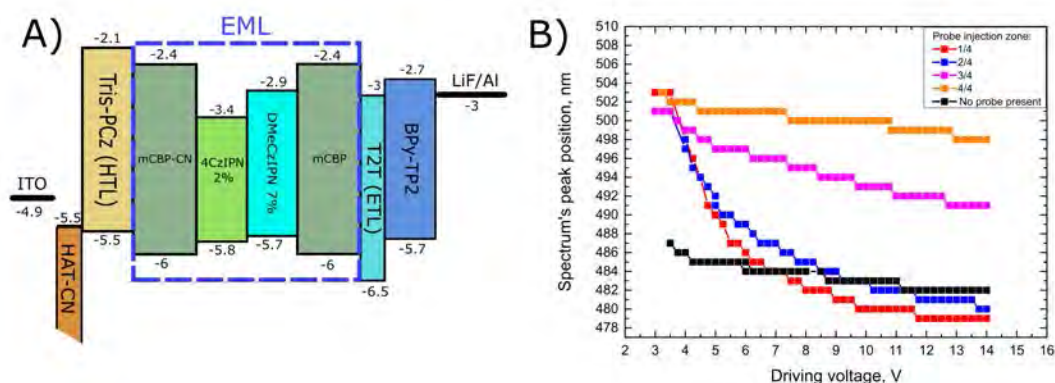

**Fig. 1.** A) Energy level diagram of mixed host OLED; B) Emission spectrum peak position vs driving voltage and its dependency on probe position

- [1] Liang, X., Tu, Z.-L. and Zheng, Y.-X. Thermally Activated Delayed Fluorescence Materials: Towards Realization of High Efficiency through Strategic Small Molecular Design. *Chem. – Eur. J.* 25, 5623–5642 (2019).
- [2] Mac Ciarnáin, R. et al. A Thermally Activated Delayed Fluorescence Green OLED with 4500 h Lifetime and 20
- [3] Xu, M. et al. Analyzing exciton distribution in organic light-emitting devices using near-infrared probes. *Appl. Phys. Lett.* 122, 261107 (2023).
- [4] Kreiza, G. et al. Ambipolar hosts for blue TADF OLEDs: Assessment of the device performance and lifetime. *Org. Electron.* 120, 106849 (2023).