THE 67TH INTERNATIONAL



## OPEN READINGS

CONFERENCE FOR STUDENTS OF PHYSICS AND NATURAL SCIENCES

## BOOK OF ABSTRACTS

2024



## Editors:

Martynas Keršys Rimantas Naina Vincentas Adomaitis Emilijus Maskvytis

Cover and Interior Design:

Goda Grybauskaitė

Vilnius University Press 9 Saulėtekio Av., III Building, LT-10222 Vilnius info@leidykla.vu.lt, www.leidykla.vu.lt/en/ www.knygynas.vu.lt, www.journals.vu.lt

Bibliographic information is available on the Lithuanian Integral Library Information System (LIBIS) portal www.ibiblioteka.lt ISBN 978-609-07-1051-7 (PDF)

© Vilnius University, 2024

## 3D GRADIENT PERIOD PHOTONIC CRYSTALS FABRICATED VIA ULTRAFAST LASER LITHOGRAPHY

Eulàlia Puig Vilardell<sup>1,2</sup>, Darius Gailevičius<sup>2</sup>, Mangirdas Malinauskas<sup>2</sup>

<sup>1</sup>Erasmus Mundus Joint Master Degree EUROPHOTONICS <sup>2</sup>Laser Research Center, Faculty of Physics, Vilnius University, Sauletekio Ave. 10, LT-10223 Vilnius, Lithuania eulalia.puig@ff.stud.vu.lt

Two photon lithography is a Laser Direct Writing technique (DLW) that allows high precision 3D micro and nano-structures manufacturing with sub-diffraction-limit resolution. Thanks to the advent of femtosecond lasers, nonlinear light-matter interactions are achievable by focusing such high intensity beams into the photo-resins, which due to temporal and spatial overlap can result in two- or even multi-photon absorption inside the volume of the tightly focused laser beam, allowing to polymerize the material in a small confined region, Fig. 1a. This significant advantage makes it a suitable and high desirable technique for the fabrication of micro and nanoscale 3D structures, and it's been widely employed for applications in several fields such as microelectronics, microfluidics, life sciences or photonics.

In this work we explored one of these applications: the fabrication of a 3D photonic crystal, Fig. 1b, able to slow down while spatially separating the frequency components of the light, which results in a localized increase of light intensity chromatically resolved, and thus can be used for application in which enhanced light-matter interaction is required, like optical sensors, solar cells or night vision devices.

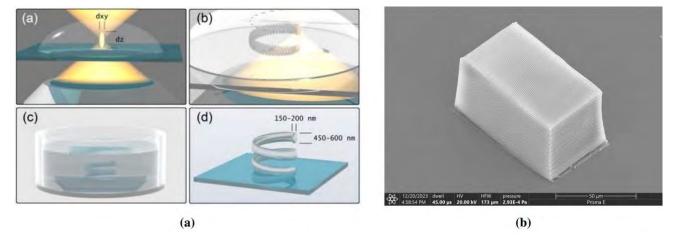


Fig. 1. (a) The principle of direct laser writing 3D nano-lithography, reproduced from [1]. (b) 3D woodpile structure designed for the realization of slow light fabricated via two photon lithography.

After studying how the different fabrication parameters influence the resulting structure, the optimal parameters have been used to fabricate a sample that fullfills the spatial requierements for it to be functional and act as a slowing light photonic crystal.

<sup>[1]</sup> S. Varapnickas and M. Malinauskas, Processes of Laser Direct Writing 3D Nanolithography (Springer International Publishing, Cham, 2020)